



Product Comparison

This is a side by side comparison of all the styles of slings and brackets we offer.

						Wall Mount			Boat Position		Available Accesories
		Indoor	Outdoor	Freestanding	Modular	Finished Wall	Exposed Studs	Slanted	Flat	Casters	Paddle Rack
	SlingSet	Yes	Yes	No	No	Yes	Yes	Yes	Yes	Yes	Yes
	Kayak Condo- Flat	Yes	No	No	No	Yes	Yes	No	Yes	No	No
	Kayak Condo- Tilt	Yes	No	No	No	Yes	Yes	Yes	No	No	No
	SeaHorse	Yes	Yes	Yes	No	No	No	No	Yes	Yes	No
	Double / Triple Bunk	Yes	No	Yes	No	No	No	No	Yes	Yes	No
Classic System	Acadia	Yes	Yes	Yes	Yes	No	Yes	No	Yes	Yes	Yes
	Penobscot	Yes	Yes	Yes	Yes	Yes	Yes	Yes	No	Yes	Yes
	Saranac-Canoe	Yes	Yes	Yes	Yes	No	No	No	Yes	Yes	Yes
	Saranac-Kayak	Yes	Yes	Yes	Yes	No	No	No	Yes	Yes	Yes

How to Measure Your Boat


Measure 3 feet out from the center of your boat in both directions. These dimensions are not absolute. The shape of your boat is a factor which we can not account for.

Acadia—22 in. or less at point A

Penobscot—12 in. or less at point B

Saranac for Kayaks—22 in. or less at point A

Saranac for Canoes—32 in. or less at point A

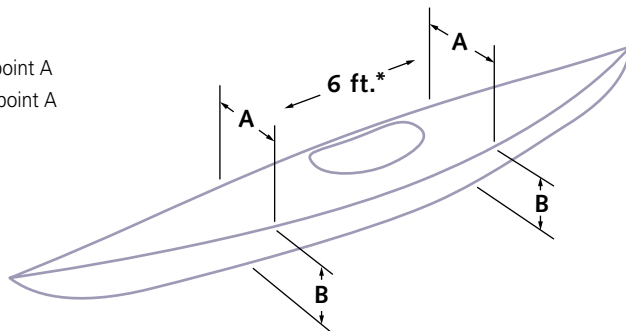

*Kayak Condo posts, SeaHorse, and SlingSet do not require a 6 foot distance. Use the chart below to determine how far apart yours should be. These dimensions are approximate. Your results may vary.

Kayak Condo Flat—22 in. or less at point A

Kayak Condo Tilt—12 in. or less at point B

SeaHorse — Unlimited at point A or B

SlingSet—Maximum girth 60"

Length of boat (in feet)	Distance between supports (in inches)	
6 - 8	48	These dimensions assume all studs are at 16 inch intervals. Your dimensions may vary.
8 - 10	64	
10 - 12	80	
12 - 14	96	
14 +	112	